


PRODUCT DATA SHEET

Figure:

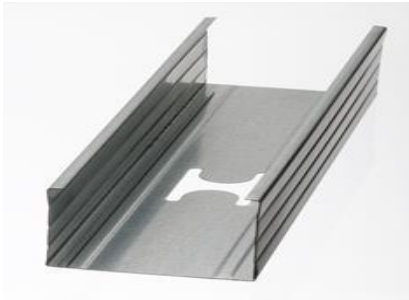

IntraProfil CW 50
IntraProfil CW 75
IntraProfil CW 100
IntraProfil CW 125
IntraProfil CW 150

| Technical data | |
|-------------------------|--|
| Material quality | Galvanized sheet steel according to EN 10143, EN 10346, Zinc at least 100 g/m ² two-sided (Z100), material: 1.0226, quality DX51D+Z100, min. yield strength 140 MPa (N/mm ²), tensile strength ≥ 270 MPa (N/mm ²) |
| Material thickness | 0.6 mm ± 0.06 |
| Web height | CW 50 48.8 mm CW 75 73.8 mm CW 100 98.8 mm CW 125 123.8 mm CW 150 148.8 mm |
| Flange width | 49/47 mm |
| Corrosion protection | At least 100 g/m ² two-sided (Z 100) |
| Conformity | DIN 18182-1; ÖNORM 18182-1; EN 14195 |
| Punch-outs | 48 x 31 mm |
| Building material class | A 1 - non-combustible |
| Product description | IntraProfil CW-profiles are made of galvanized quality steel according to EN 10346 and are used to create ceiling/wall structures in the interior. Conformity to DIN 18182-1, ÖNORM 18182-1 and EN 14195 is certified. |

This product data sheet corresponds to the current level of development. The suitability of the products cannot take into account the special aspects of the individual case and are provided without any warranty. Warranty and liability are subject to our general conditions for delivery. All details are given without guarantee.

IntraProfil Bausysteme GmbH

Am Wald 7

97348 Rödelsee

www.intraprofil.de Phone: 09323-8748-0

Rödelsee, 02.01.2019

CzaSch, managing director