


# PRODUCT DATA SHEET

Figure:

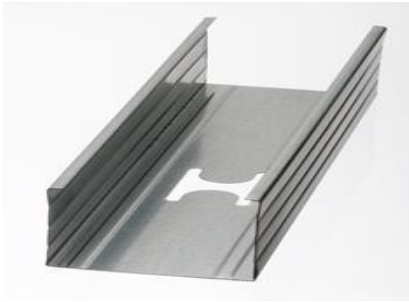

**IntraProfil CW 50**  
**IntraProfil CW 75**  
**IntraProfil CW 100**  
**IntraProfil CW 125**  
**IntraProfil CW 150**

Technical data	
Material quality	Galvanized sheet steel according to EN 10143 and EN 10346, Zinc at least 100 g/m <sup>2</sup> two-sided (Z100), material: 1.0226, quality DX51D+Z100, min. yield strength 140 MPa (N/mm <sup>2</sup> ), tensile strength ≥ 270 MPa (N/mm <sup>2</sup> )
Material thickness	0.6 mm ± 0.06
Web height	CW 50      48.8 mm CW 75      73.8 mm CW 100     98.8 mm CW 125     123.8 mm CW 150     148.8 mm
Flange width	49 / 47 mm
Corrosion protection	At least 100 g/m <sup>2</sup> two-sided (Z100)
Conformity	DIN 18182-1; EN 14195
Punch-outs	48 x 31 mm
Building material class	A 1 - non-combustible
Product description	IntraProfil CW-profiles are made of galvanized quality steel according to EN 10346 and are used to create ceiling / wall structures in the interior. Conformity to DIN 18182-1 and EN 14195 is certified.

This product data sheet corresponds to the current level of development. The suitability of the products cannot take into account the special aspects of the individual case and are provided without any warranty. Warranty and liability are subject to our general conditions for delivery. All details are given without guarantee.

IntraProfil Bausysteme GmbH

Am Wald 7

97348 Rödelsee

[www.intraprofil.de](http://www.intraprofil.de) Phone: 09323-8748-0

Rödelsee, 28.11.2022

CzaSch, managing director